


Controlled, bubble-free dispensing for bonding and lacquer coating.

UV adhesives resin UV coatings



The 752HF valve system is specifically designed for precise dispensing of UV-cure resins and similar fluids used in media manufacturing of Blu-Ray DVDs, DVDs and CDs. Unrestricted material flow reduces turbulence and the formation of micro bubbles.

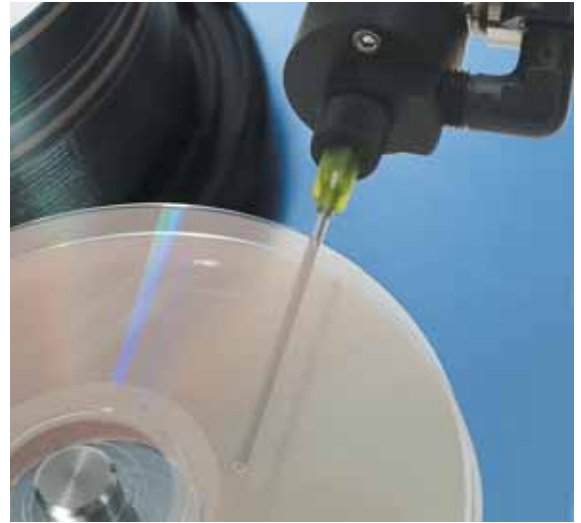


Features

- High-flow capability for thicker UV-cure coatings
- Positive shutoff, no seals
- Valve open time as short as 15 milliseconds
- Cycle rate exceeds 500/minute
- Acetal copolymer or 303 stainless steel fluid bodies
- Tamper-resist stroke control adjustment
- **Compact and lightweight**
- Low-maintenance design


Electronic pdf files of Nordson EFD manuals are also available at www.nordsonefd.com

Diaphragm valve systems

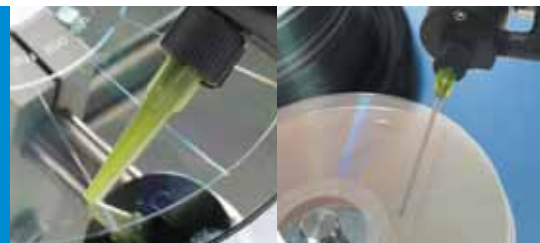

The complete system includes the 752HF dispense valve, ValveMate™ 8000 controller, fluid reservoir and dispense tip.

Expert technical assistance and high quality standards ensure productive, trouble-free performance. Nordson EFD offers a full line of reliable dispensing systems to meet your specific application requirements.

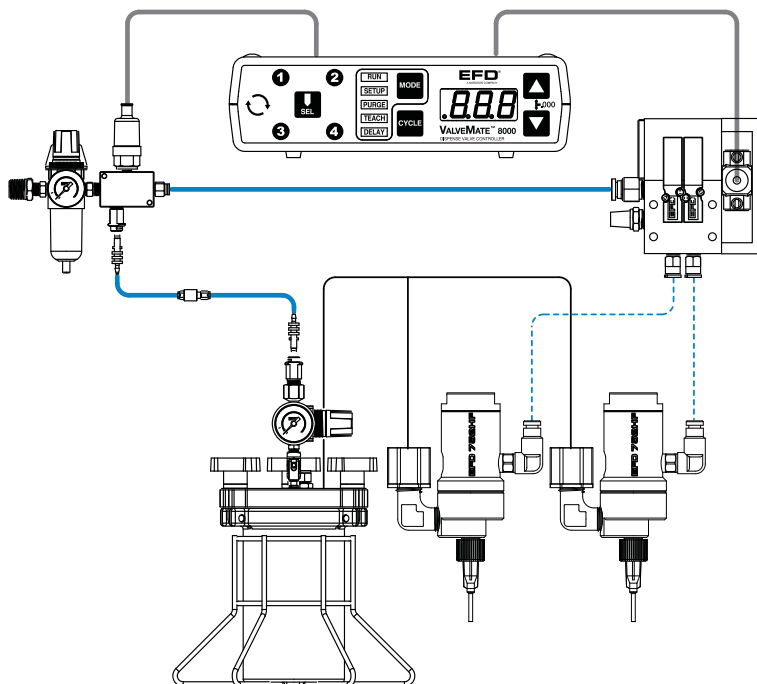

ValveMate 8000 Controller

Valve open time is the primary control of deposit size. The ValveMate controller puts push-button adjustment of valve open time where it needs to be — at the valve.

- Multi-valve control- up to (4) valves
- Partner to Programmable Logic Controller (PLC)
- Easy deposit size control
- Increased production output
- End user convenience
- On-the-fly adjustability
- Maximum machine efficiency

Automation: XYZ & XYZR Robot Dispensing Systems

Nordson EFD offers a wide selection of XYZ and XYZR robot systems that are fully compatible with ValveMate valve controller systems. Consistent, accurate, repeatable and complex dispensing applications can be easily performed with EFD robots, with working envelopes that range from 200 x 200 x 50mm to 510 x 510 x 100mm. Scara robot systems are also available for larger, heavier products or inline dispensing applications.

Fluid Reservoirs

Nordson EFD reservoirs are supplied with precision, constant-bleed regulators to ensure consistent fluid pressure to the valve.

Tank reservoirs are available in 1.0, 5.0 and 19.0 liter capacities. Cartridge sizes range from 2.5 to 32 ounces (75cc to 950cc).

Note: The 1.0 liter tank accepts a 1 lb. bottle of cyanoacrylate.

Dispense Tips

Tip selection is critical to achieve optimum valve performance. 752V Series valves are packaged with a dispensing tip kit for maximum fluid control. The kit includes smooth-flow tapered tips in sizes from 14 to 25 gauge, precision stainless steel tips in sizes from 14 to 21 gauge, and tip caps.

752HF Diaphragm Valve

The 752HF dispense valve incorporates an inert polymer diaphragm that isolates the actuator from the valve and provides very fine flow control for all low to medium viscosity fluids. The unique design of the 752HF valve provides quick valve ON/OFF and the ability to rapidly obtain maximum flow rates.

Amount dispensed depends on valve open time, fluid pressure, fluid viscosity, flow adjustment and tip size.

Size: 64.77mm x 23.8mm (2.55" x 0.94")

Weight (less fittings): 752HF-SS: 123 grams (4.3 oz)
752HF-A: 81 grams (2.85 oz)

Actuating air pressure required: 4.8-6.2 bar (70-90 psi)

Maximum fluid pressure: 4.8 bar (70 psi)

Fluid inlet thread: 1/8 27NPT UNF

Mounting: (1) M5 x 0.8 tapped hole


Cycle rate: Exceeds 500 per minute

Air cylinder body: Hard coated aluminum

Fluid body: 752HF-SS: 303 stainless steel
752HF-A: Acetal copolymer

Piston: Type 303 stainless steel

Diaphragm: UHMW* polyethylene

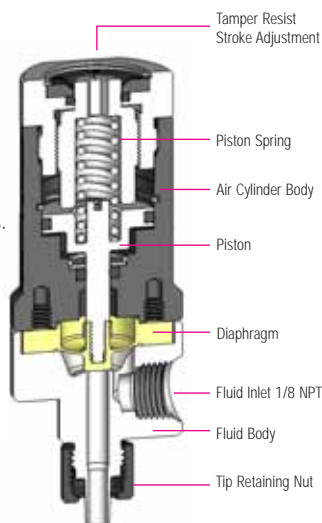

All stainless steel parts are passivated.
*Ultra High Molecular Weight polyethylene

For Nordson EFD sales and service in over 30 countries, contact EFD or go to www.nordsonefd.com

East Providence, RI USA
USA & Canada: 800.556.3484; +1.401.431.7000
info@nordsonefd.com

Dunstable, Bedfordshire, UK
0800 585733; +44 (0) 1582 666334
Ireland 00800 8272 9444
europe@nordsonefd.com

China: +86 (21) 3866 9006
china@nordsonefd.com

Singapore: +65 6796 9522
sin-mal@nordsonefd.com

The Wave Design is a trademark of Nordson Corporation.
©2010 Nordson Corporation v051510

