




740V-HL

Incorporating precision needle control and zero fluid dead volume, the 740V-HL is designed for millions of trouble-free operations. Use for precise beads and dots of low to medium viscosity nonreactive fluids.

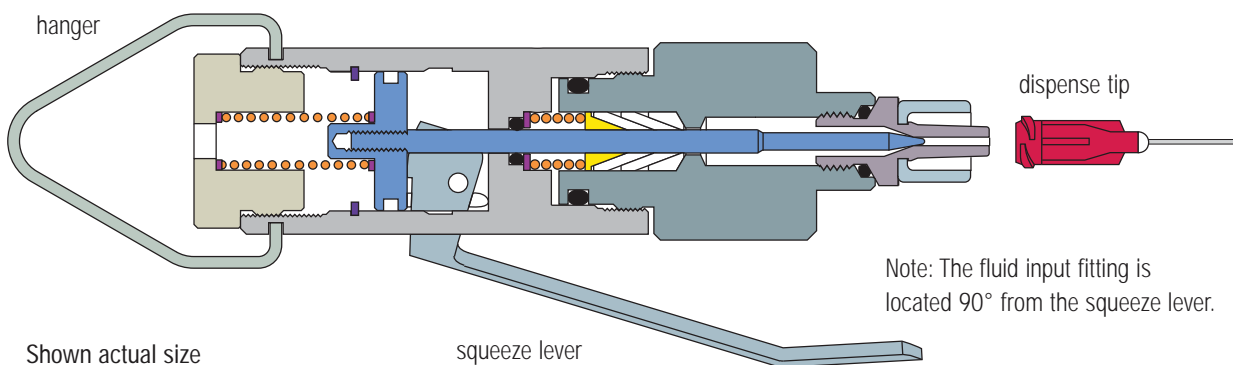

Shown actual size

Weight: 130.8 grams (4.61 oz).

Wetted Materials:

hard-coated aluminum

Teflon®

stainless steel

Operation

Squeezing the lever causes the sealing needle to retract, allowing the pressurized fluid to flow out the dispense tip. Releasing the lever causes immediate no-drip cutoff of fluid flow.

Applications

Use the 740V-HL to apply solder masks, liquid flux, ink-based paints for marking and decoration, and all types of honey-like and white glues.

Order tanks and dispense tips separately. See pages 6-7.
For fluid compatibility, see page 2.